


SmartPTT Monitoring 9.1

Release Notes

New and updated features

1. Support for Extended Range Direct Mode configuration in the NAI systems.

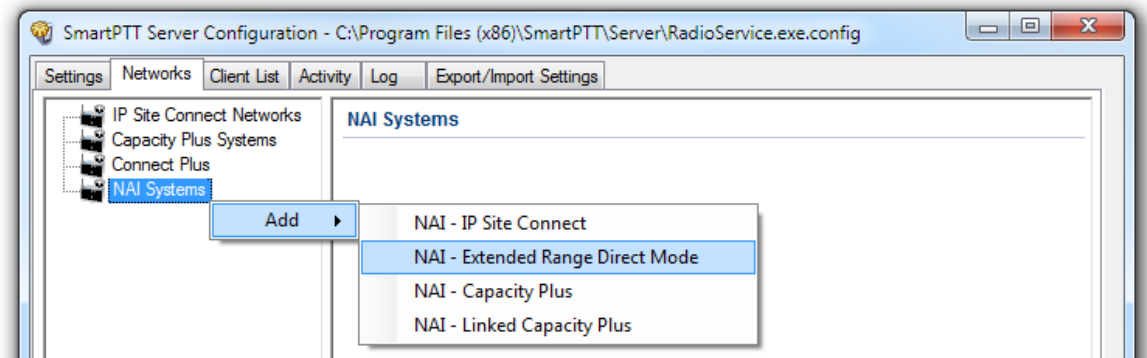

Enhancements

1. In the “SmartPTT Server Configuration” program all systems moved from the “Settings” tab to the new tab called “Networks”.
2. Added system messages to inform users about insufficient free space in the database.
3. “Valid” velocity of the subscriber risen up to 250 m/s. If velocity is greater than that, GPS data considers wrong.
4. Added the dialog on closing “SmartPTT Dispatcher” with unsaved changes.
5. Version and build were added to the service logs of both “SmartPTT Server” and “SmartPTT Dispatcher”.
6. Dramatically increased the maximum number of records in Event Log (200,000 by default).
7. Added filter by radio ID in the Activity log of “SmartPTT Server”.
8. Added timestamps into the GPS responds in the Activity tab of SmartPTT Server.

Additional information

1. Invalid licenses are added to the blacklist.
2. Adding a new system and network is slightly simplified.
3. Documentation is updated.

